


## VIP - Pneumatic Coaxial Valve



Macro Pneumatic valves

Category VIP - Pneumatic Coaxial Valve

### benefits

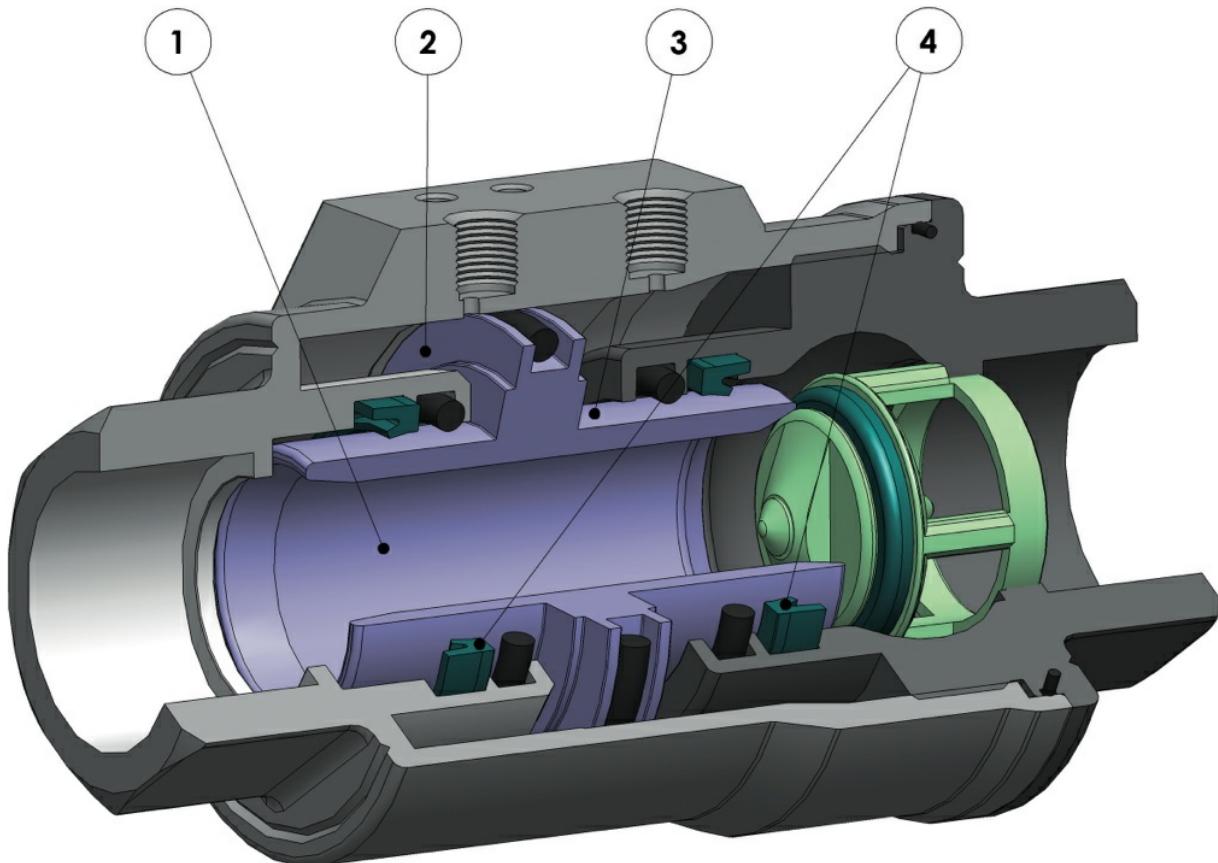



**1. Internal diameter equal to the diameter of the pipe**

High flow capacity

**2. Pneumatic actuator integrated in the valve**

Space saving (-60%) and reduced costs compared to an automated valve

**3. Piston with chemical nickel plating (20-25 micron)**

Lower wear of the seals due to the increase of the surface hardness (400 -550 HV)

**4. Lip seals**

Less wear of the seal comparing with an o-ring

**Several seal materials available**

Maximum compatibility with different types of fluids depending by the seals used

**No external moving parts**

Maximum safety

Easy mounting

**Long life time granted**

Lifetime 10 times longer than a ball valve with with reduced maintenance costs

**100% in- house manufacturing process technology**

Maximum control and accuracy in all the stages of the manufacturing process

**Less Air consumption**

80% less air consumption compared to an actuated valve with SR pneumatic actuator therefore less load on the compressor or the possibility of using a smaller compressor's size.

**ATEx Certificate**

Installation is allowed in a potential explosive environment

**PED Certificate**

Full compliance with European Safety Standards for Pressure Equipment

## features

### GENERAL FEATURES:

Both Double Acting and Spring Return VIP valves (either Normally Open or Normally Closed) are available in sizes ranging from 3/8" to 2".

Unidirectional flow.

GAS threaded ends as per EN 10226-1 Rp (Ex ISO 7/1) - DIN 2999 (NPT threads on request) with control fluid connections as per NAMUR interface.

Improved fluid dynamics allow minimum pressure losses. See Flow Pressure Diagram.

VIP valves can be used in any mounting position (horizontal, vertical or oblique).

They can be provided with seals in NBR, FKM or EPDM:

- NBR: suitable for air, gas, oils, water etc..

- FKM: perfectly suitable for most fluid. Unsuitable for steam.

- EPDM: perfectly suitable for hot water and steam. Unsuitable for mineral products (oils, grease, etc.).

For further information about gas, explosive fluids, material compatibilities etc. please contact our technical department.

Valve opening and closing can be signalled by means of external magnetic limit switches (to be requested on ordering the valves, as they cannot be assembled afterwards).

**According to 2014/68/EU "PED" - 2014/34/EU ATEX configuration to request at time of order.**

### CONTROL MEDIA:

Filtered compressed air, not necessarily lubricated. At temperatures from -20°C to 0°C, use dry air. In case of lubricated air, seal compatible oil must be used.

Air supply:

3 bar min.- 8 bar max. in Double Acting execution.

4,2 bar min.- 8 bar max. in Spring Return execution.


### OPERATING MEDIA:

Pressure: 10 bar max, see diagram

Temperature: from -20°C to +80°C (NBR); from -20°C to +150°C (FKM); from -20°C to +150°C (EPDM).


Vacuum tightness: 97% vacum (about 30 mbar absolut, -980 mbarg)

## dimensions

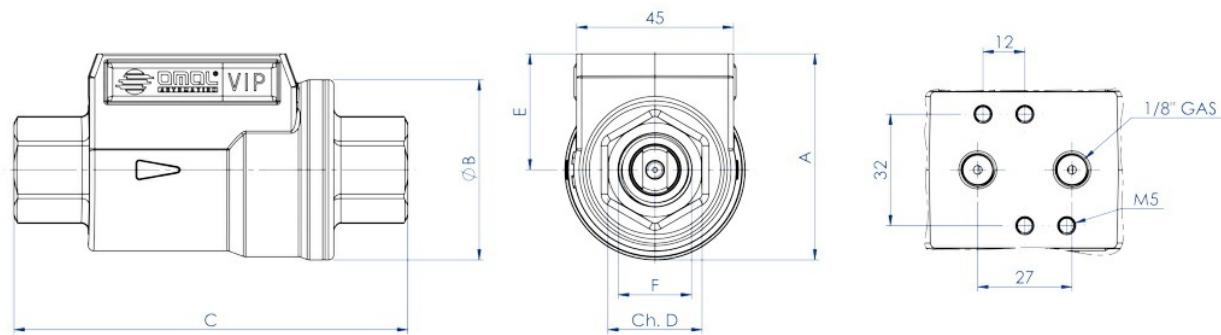

DIMENSIONS							
DN nominal diameter mm.	10	15	20	25	32	40	50
size F GAS.	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"
bore mm.	10	15	20	25	32	40	50
A mm.	54	60	70	76	92	102	115
ØB mm.	46	51,7	63,5	69	86	96	109
C mm.	98	112	135	143	165	180	207
ch. D mm.	22	27	33	41	50	60	75
E mm.	31	34	39	42	49	54	60
double acting air dm <sup>3</sup> /cycle	0,024	0,035	0,063	0,080	0,150	0,219	0,310
spring return air dm <sup>3</sup> /cycle	0,012	0,017	0,031	0,040	0,075	0,109	0,155
weight double acting "DA" Kg.	0,80	1	1,59	1,8	3,13	3,5	5,5
weight spring return "SR" Kg.	0,85	1,05	1,69	1,88	3,41	3,7	5,8


## materials

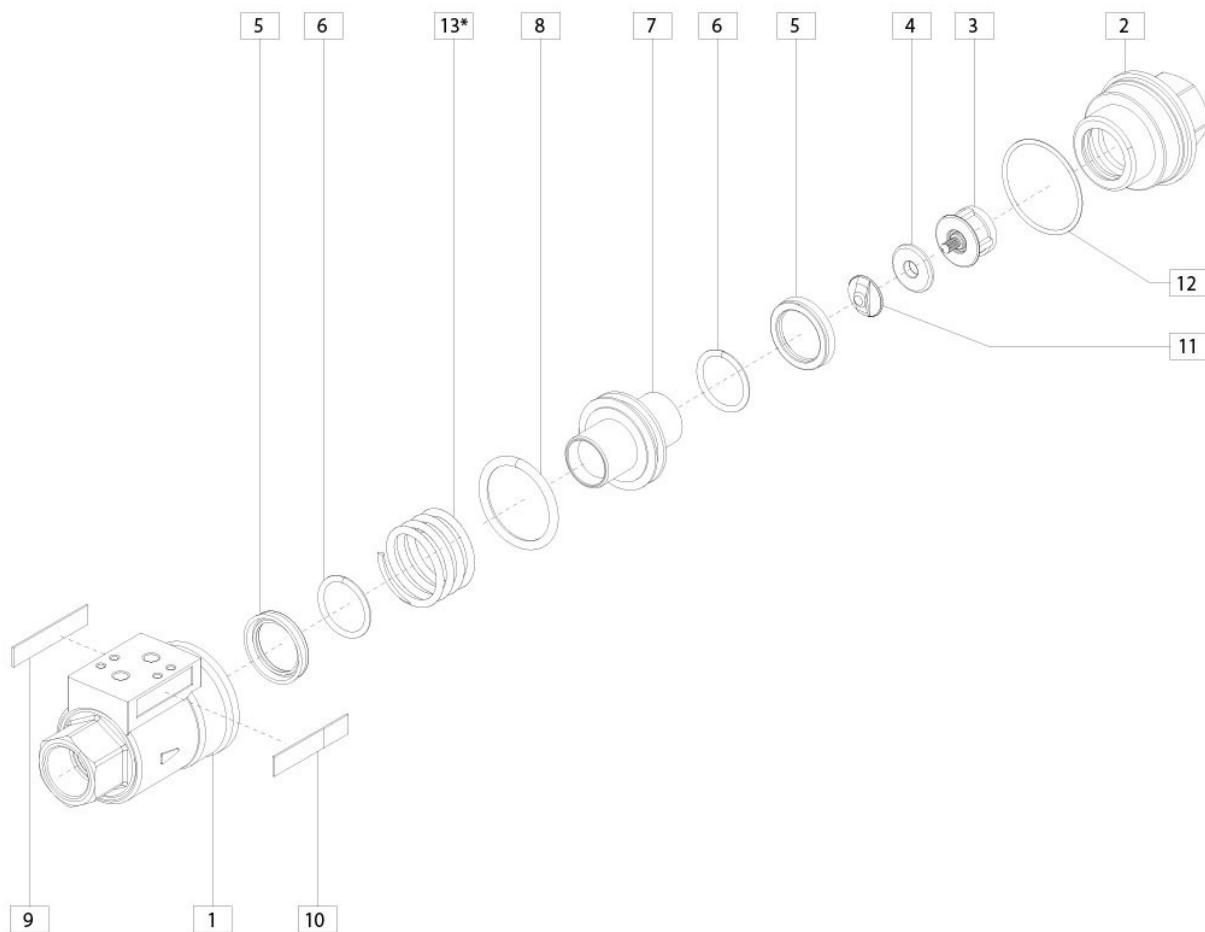


MATERIALS				
Pos.	Description	Q.ty	Material	Standard Treatment
1	body	1	brass	EN 12165 CW617N - nickel plated
2	sleeve	1	brass	EN 12165 CW617N - nickel plated
3	seat	1	brass	EN 12165 CW617N - nickel plated
4**	seat-seal	1	NBR/FKM/EPDM	
5**	lip seal	2	NBR/FKM/EPDM	
6**	O-ring	2	NBR/FKM/EPDM	
7	piston	1	brass	EN 12165 CW617N - nickel plated
8**	piston O-ring	1	NBR/FKM/EPDM	
9	technical label	1	Polyestere	
10	OMAL label	1	Polyestere	
11	seat nut	1	brass	EN 12164 CW614N - nickel plated
12**	sleeve O-ring	1	NBR/FKM/EPDM	
13	spring (only for SR)	1	Stainless steel	

\*\*Components of spare part kit


## diagrams and working plan

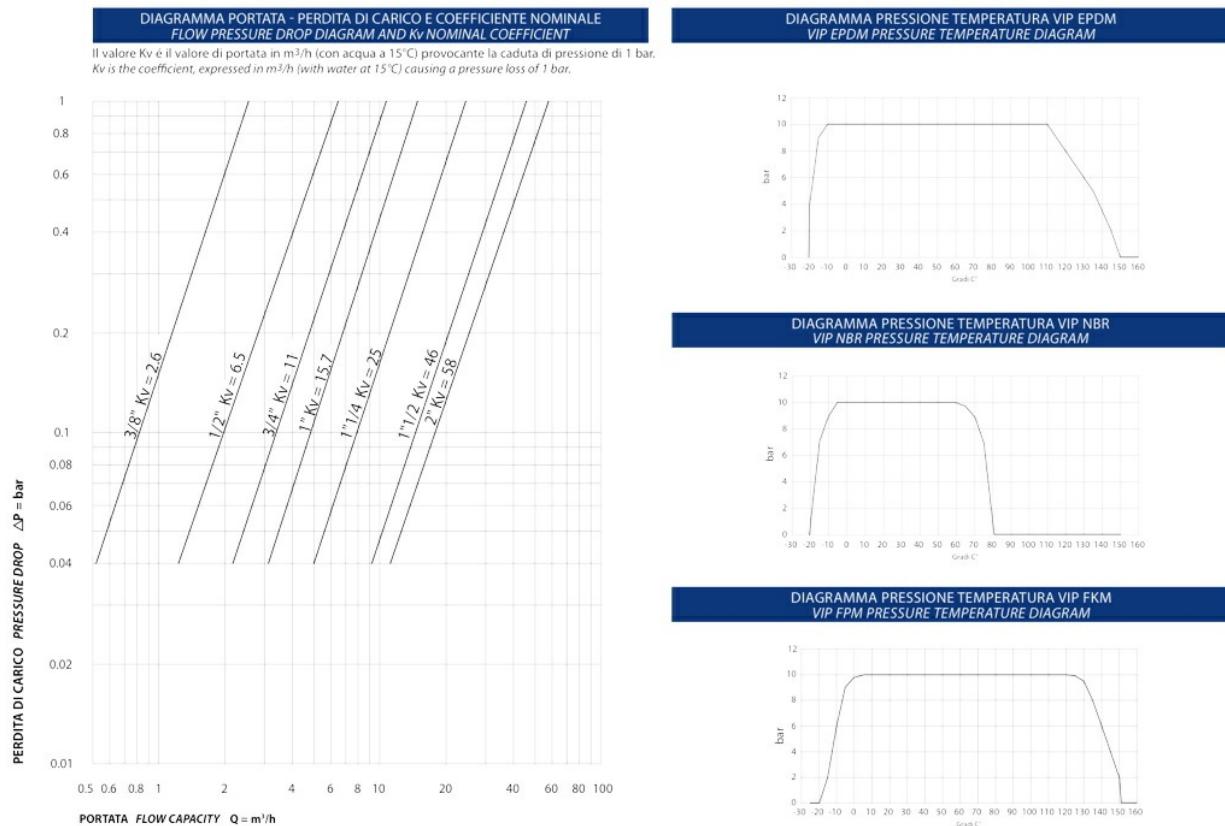


## SCHEMI DI FUNZIONAMENTO WORKING PLAN



Schema di funzionamento nella configurazione doppio effetto  
Double acting VIP Working plan



Schema di funzionamento nella configurazione semplice effetto normalmente chiuso  
Spring return Normally closed VIP Working plan




Schema di funzionamento nella configurazione semplice effetto normalmente aperto  
Spring return Normally open VIP Working plan

## specifications

### WORKING PRINCIPLE

A VIP valve (patented by OMAL exclusively) is a proper automatic valve embodying both interception device (between pipe C-D) and control device (A-B).


It works thanks to the internal movement of a piston supplied with air. At the end of its stroke (a VIP valve is an ON/OFF valve), the piston presses on the seat seal or moves away from it letting the intercepted fluid flow or stopping it from flowing. As the seat is perfectly tight and the intercepted fluid pressures discharge on it, the pressure necessary to move the piston is completely independent of the fluid pressure. As a result OMAL has been able to design a light space saving and lasting valve. Its full bore and its improved internal dynamics allow minimum pressure losses, too.

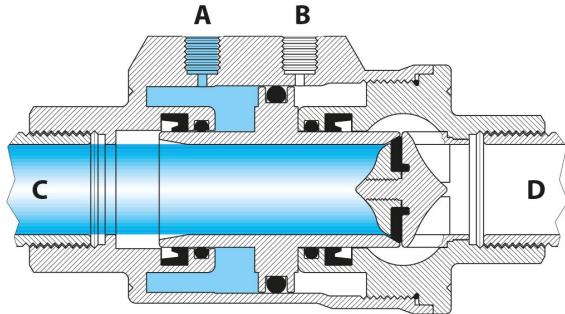

### Closed valve


Supplying the hole "A" with air (the hole "B" must be discharging) at the end of its stroke the piston presses on the seat seal: the valve is closed.

As in Spring Return N.C. executions the spring is in "A", if there is no control, the piston will touch the seat seal: therefore, the preferable position is the closed one.

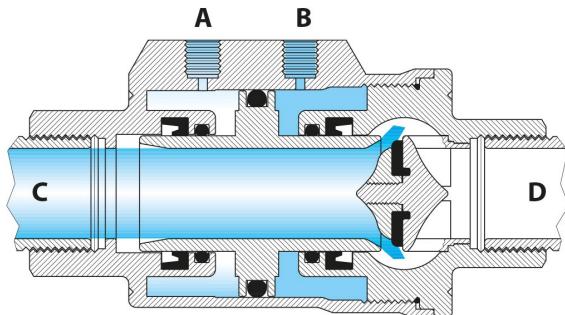

### Transitional phase


During the transitional phase (the picture shows the opening transition in a Double Acting execution), one of the two holes is supplied. The piston moves axially changing the previous closed or open state. In Spring Return N.C. executions, the closing is caused by the spring (if there is no control). In Spring Return N.O. executions, the opening is caused by the spring (if there is no control). Both opening and closing transitional phases last less than a second.

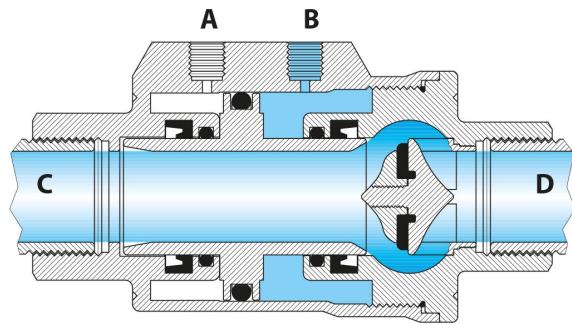**Opened valve**

Supplying the hole "B" with air (the hole "A" must be discharging) at the end of its stroke the piston is at maximum distance from the seat seal: the valve is open. As in Spring Return N.O. executions the spring is in "B", if there is no control, the piston will be away from the seat seal: therefore, the preferable position is the open one.

## accessories

### VIP with NAMUR solenoid valve


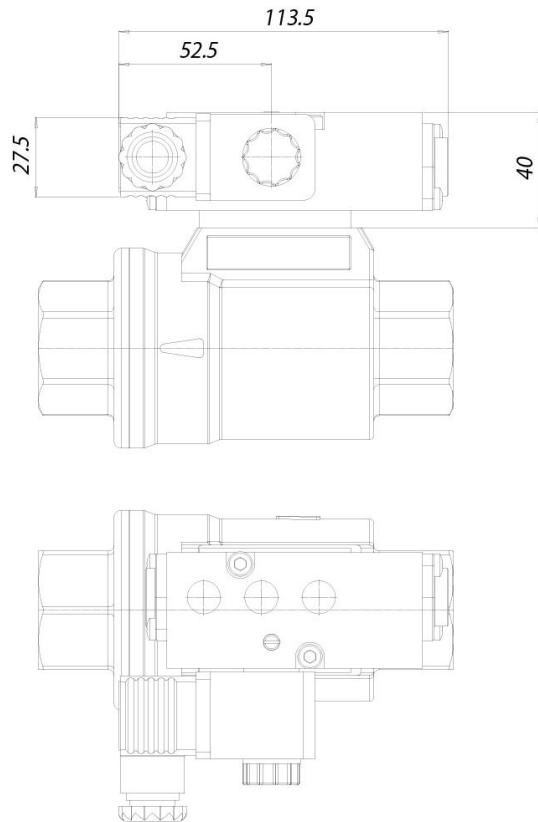


#### Solenoid valve 5/2 as per NAMUR

This solenoid valve is designed for the selection of the functions 5/2 and 3/2, which is realized by using the appropriate plate. Full-working input power - D.C.: 2.5 W Full-working input power - A.C.: 2 W Supply voltage tolerances: +/- 10% Coil insulation: F-class Protection with connector: IP65 Electric connection: PG 9 Pneumatic connections: inlet 1/4"; outlet 1/4" ISO 228 Max. pressure: 10 bar Operating media temperature: from -10°C to +80°C Ambient temperature: from -10°C to +50°C

#### NAMUR SOLENOID VALVE

Solenoid valve	ER8188A2	ER8188A4	ER8188A5	ER8188C2	ER8188C4
Voltage	24V AC	115V AC	230V AC	24V DC	110V DC

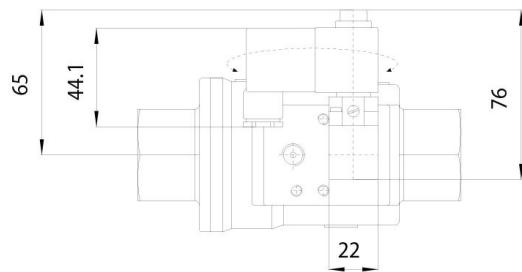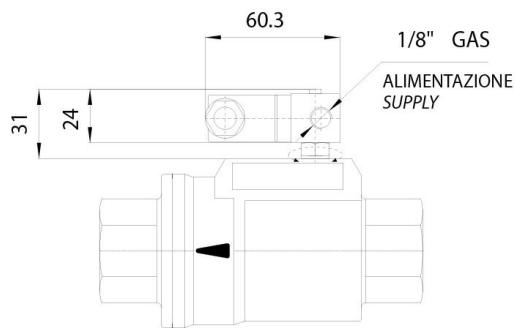**VIP with microsolenoid valve**

**Micro solenoid valve :**

This solenoid valve is connected by a joint which fits directly to the actuator air intake, without other fittings or fixing screws.

3/2 solenoid valve, with solenoid available in the following voltages: 24-110-220V AC; 12-24V DC.

Starting input power - A.C.: 9 VA

Full-working input power - D.C.: 5 W

Full-working input power - A.C.: 6 VA

Supply voltage tolerances: +/- 10%

Copper wire insulation: H-class

Coil insulation: F-class

Protection with connector: IP65

Electric connection: PG 9 any orientation acceptable 360°

Pneumatic connections: 1/8" ISO 228 any orientation

acceptable 360°

Max. pressure: 10 bar


Operating media temperature: from -10°C to +50°C

Ambient temperature: from -10°C to +50°C

Ø Bore 1,3 mm


**MICRO SOLENOID VALVE**

Solenoid valve	EP415024	EP415110	EP415220	EP412012	EP412024
Voltage	24V AC	115V AC	230V AC	12V DC	24V DC

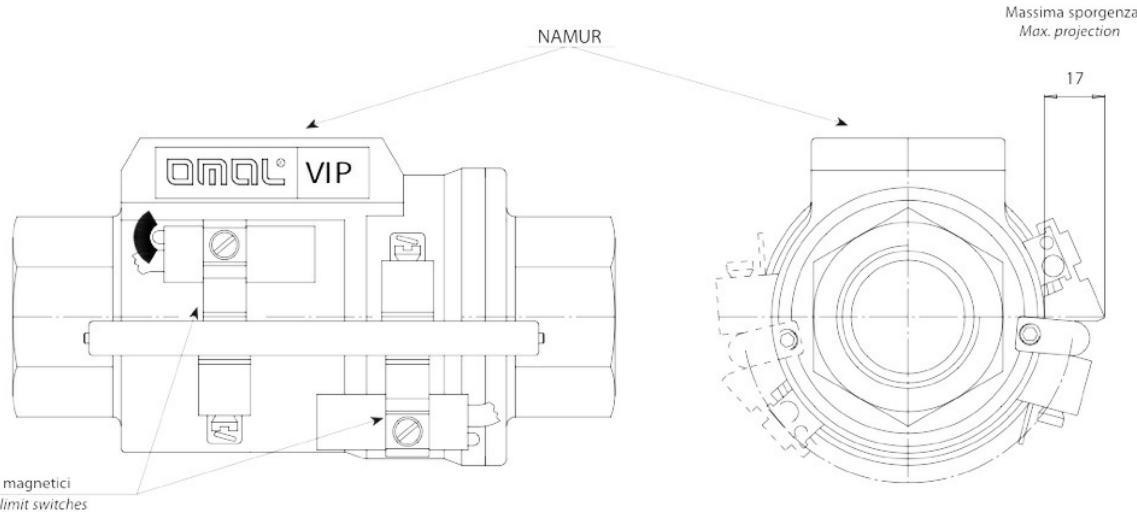

A VIP valve can be provided with magnetic limit switches and signalling LED. Limit switches are supplied with a KIT which makes it possible to fix them on the outside easily and quickly. Since the magnets are situated inside the valve, they must be assembled while mounting the VIP and not afterwards. That's the reason why the limit switches must be requested on ordering the valve.

#### Limit-switch electric plan

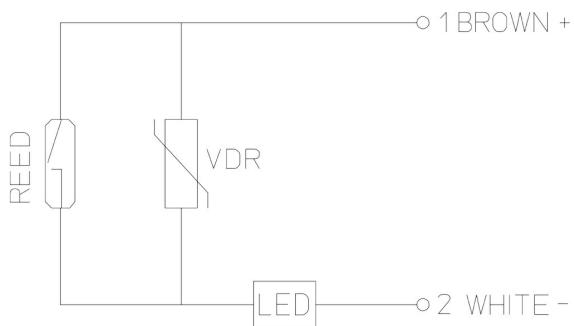

LIMIT -SWITCH ELECTRICAL FEATURES	
Switch indicator	LED
Protection level	IP 67
Nominal voltage with direct current	3÷250 V dc
Nominal voltage with alternating current	3÷250 V ac
Maximum voltage drop	2,5 V
Maximum power with direct current	50 W
Maximum power with alternating current	50 VA
Maximum current at 25°C (resistive load)	1 A
Protection against inductive tension peaks	250 VR
Inverse polarity protection	.
Massimo carico applicabile (bobina con soppressore di sovrattensioni)	
Maximum applicable load (coil with overvoltage suppressor)	10 W
Maximum applicable load (simple coil)	10 W
Maximum applicable load (PLC)	.
Electric life (resistive load 20% max. power short distance between load and switch)	10x106
Repeatability	0,1 mm
Operating time (resistive load)	2 ms
Te Release time (resistive load)	0,1 ms
Working temperature	-30÷+80 °C
Impact resistance (11ms)	50 g
Vibration resistance	1000 Hz
Sensor type	1
Connecting cable 2m	n° 2 fili



## documents

### Certificates

[EAC EX](#)

[PED](#)

[EAC Pneumatic Valves](#)

[UKR](#)

### Instructions

[ISTRUZIONI ATEX 8\\_0489-02](#)

[ISTRUZIONI USO 8\\_0841\\_12](#)

[ISTRUZIONI USO UIT00A700X](#)